



7 Adjusting the lift mechanism tension

Use a screw gun with a #2x2 POZI driver bit to adjust the lift mechanism to the desired tension. The tension should be the same on both lift mechanisms.

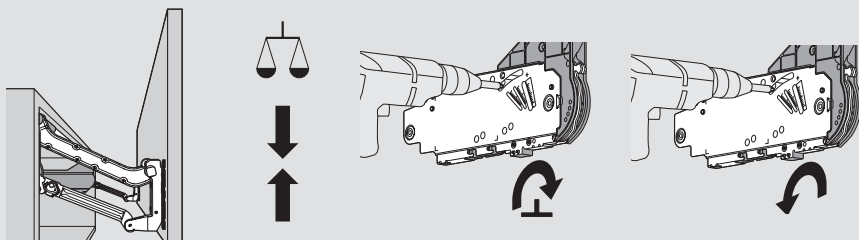

8 Adjusting the door

Use a POZI screwdriver to adjust cam adjustments for each of the three-dimensional adjustments.

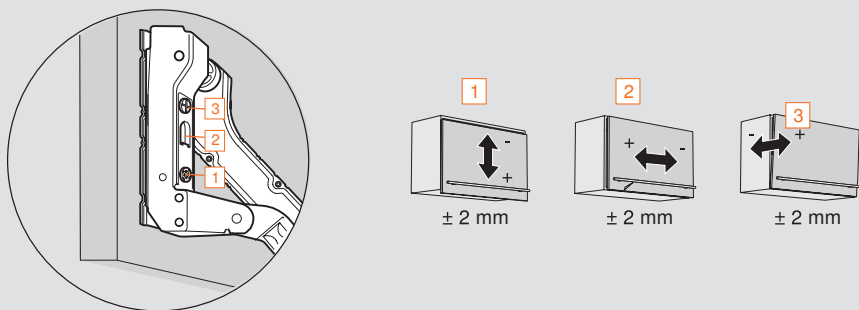

9 Attach covers

Place the left and right cover plates over the appropriate lift mechanisms and snap them in place.

